



QUALITY... PLAIN & SIMPLE®

## Goolsby Edition Billet Aluminum Exhaust Tips Installation Instructions

### General Installation Notes:

Please read these instructions completely before beginning the installation. If you have any questions please call.

Before beginning the installation, disconnect the negative battery cable and use wheel chocks to block the vehicle's wheels.

### Refer to Fig. 1 for the component names.

The Goolsby Edition Billet Aluminum Exhaust Tips are offered in either an exhaust adapter design or a V-Band design. Both types utilize a 3" diameter extension that is threaded into the Exhaust Tip. The Exhaust Tips have a two-piece body. They are NOT symmetrical. Each Exhaust Tip is the mirror image of the other. The front and back parts are not interchangeable from side to side.

The end of the Exhaust Tip can be machined to a different angle to match the contour of the panel it is fitting into. **Fig. 2** The end is designed with a slight curve or dome when viewed from the side.

There are four 3/8"-24 threaded holes on the back of each Exhaust Tip that can be used to attach to a mounting bracket (not supplied).

Due to the expansion rate of stainless steel when it gets hot, we recommend that you install flex couplings between the exhaust tips and the rest of the exhaust system.

# Goolsby Edition Billet Aluminum Exhaust Tips Installation Instructions

Building American Quality... With A Lifetime Warranty!®

TOLL FREE 1-877-469-7440 • tech@lokar.com • www.lokar.com

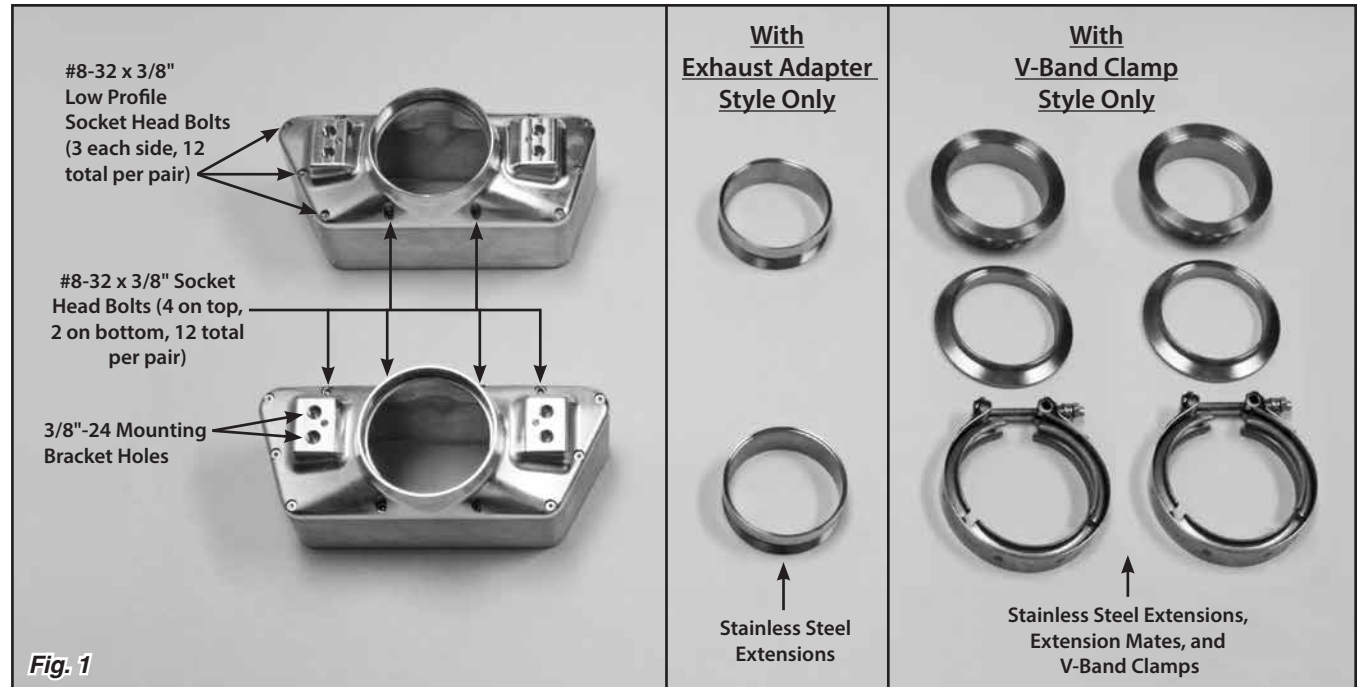


Fig. 1

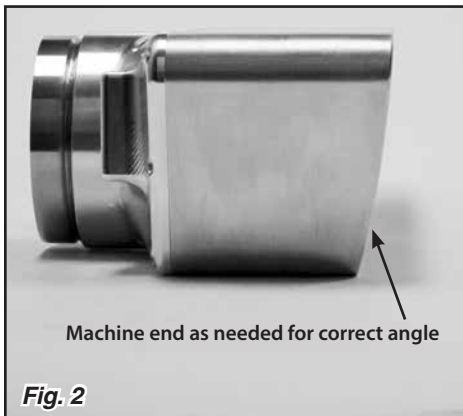


Fig. 2



Fig. 3



Fig. 4